

HT54-18X

Shanghai Aerospace Automobile
Electromechanical Co., Ltd.
website: www.ht-saae.com




Factory :
Lianyungang ShenZhou New Energy Co., Ltd.
Turkey HT Solar Energy Joint Stock Company

NEW


POWER OUTPUT

405W / 410W
415W / 420W / 425W

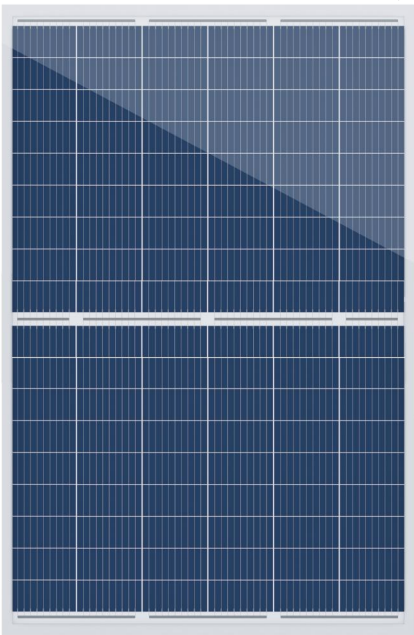

- Module Efficiency: 21.7%
- No. of Cells: 108 (6 × 18)
- Weight: 21.0kg
- Dimensions: 1724mm×1134mm×30mm

monocrystalline
182 × 91 mm

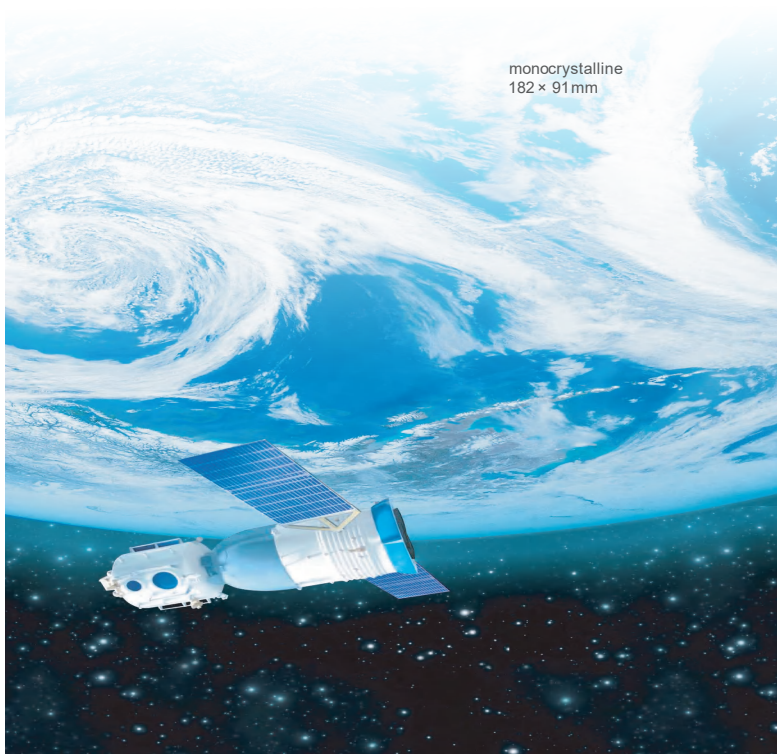

MULTIWAY



Half cut cell technology can reduce the internal power loss and improve component overall power. Excellent heat dissipation avoids hot spot production.



The optimized number and width of main gate lines, Maximize the light receiving area of components and Reduce component power consumption

12Ys
Products
Warranty



Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs

25Ys
Warranty on
power output



All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

EL

Microcrack resistant Double glass structure enhance reliability, triple EL tested of high quality control.

5W

Positive tolerance
0/+5w guaranteed



Entire module certified to with stand extreme wind (2400 Pa) and snow loads (5400 Pa)

PID

PID Resistant

Comprehensive and first-rate certification system

IEC61215: 2016, IEC61730: 2016 Latest Standard
ISO9001, ISO14001 and ISO45001,
meeting the highest international standards
Strict quality control



CEC Listed



Bloomberg
TIER 1

