
GROWATT

MAX 100~125KTL3-X2 LV

- 8 MPPTs fusefree design
- Max. string current up to 22.5A
- Smart I/V scan and diagnosis
- Intelligent string monitoring
- AC&DC type II SPD
- IP66 protection



Topology Diagram

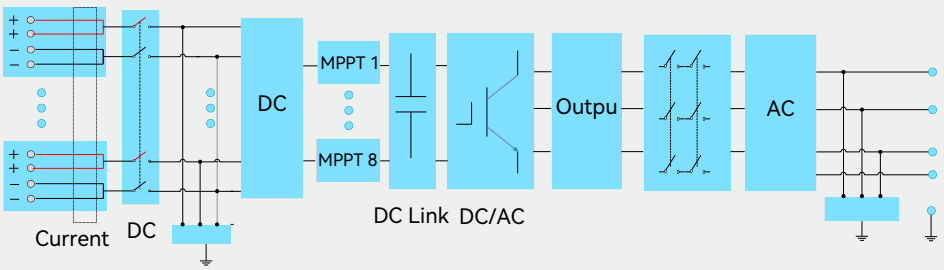

en.growatt.com

Datasheet	MAX 100KTL3-X2 LV	MAX 110KTL3-X2 LV	MAX 120KTL3-X2 LV	MAX 125KTL3-X2 LV
Input data (DC)				
Max. DC voltage	1100V			
Start voltage	195V			
Nominal voltage	600V			
MPP voltage range	180V-1000V			
No. of MPP trackers	8			
No. of PV strings per MPP tracker	2			
Max. input current per MPP tracker	45A			
Max. short-circuit current per MPP tracker	56.5A			
Output data (AC)				
AC nominal power	100000W	110000W	120000W	125000W
Max. AC apparent power	110000VA	121000VA	132000VA	137500VA
Nominal AC voltage (range*)	220V/380V, 230V/400V (340-440V)			
AC grid frequency (range*)	50/60 Hz(45~55Hz/55-65 Hz)			
Max. output current	158.8A@400V 167.1A@380V	174.6A@400V 183.8A@380V	190.5A@400V 200.5A@380V	198.5A@400V 208.9A@380V
Adjustable power factor	0.8leading ...0.8lagging			
THDi	<3%			
AC grid connection type	3W/N/PE			
Efficiency				
Max.efficiency	98.8%			
European efficiency	98.4%	98.5%	98.5%	98.5%
MPPT efficiency	99.9%			
Protection devices				
DC reverse polarity protection	Yes			
DC switch	Yes			
AC/DC surge protection	Type II / Type II			
Insulation resistance monitoring	Yes			
AC short-circuit protection	Yes			
Ground fault monitoring	Yes			
String detection	Yes			
Anti-PID function	Optional			
Arc fault detection (AFCI)	Optional			
General data				
Dimensions (W / H / D)	970/640/345mm			
Weight	84kg			
Operating temperature range	-30°C ... +60°C			
Nighttime power consumption	< 1W			
Topology	Transformerless			
Cooling	Smart air cooling			
Protection degree	IP66			
Relative humidity	0~100%			
Altitude	4000m			
DC connection	H4/MC4 (Optional)			
AC connection	Cable gland+OT terminal			
Display	LED/WIFI+APP			
Interfaces: RS485/USB/ GPRS/4G/WiFi	Yes/Yes/Optional/Optional/Optional			
Warranty: 5 years / 10 years	Yes/Optional			
	CE,UKCA,IEC 62116/61727,Poland Type A/B,CEI 0-16,CEI 0-21,C10/C11,EN 50549-1,EN 50549-2,EN 50549-1/10,N4105, N4110,VDE 0126,UNE 217001,UNE 217002,NTS Type C,IEEE1547,UIL 1741,IEC 61683/60068,CB,BIS			

* The AC voltage range and frequency range may vary depending on specific country grid standard.
All specifications are subject to change without notice.

SHENZHEN GROWATT NEW ENERGY CO.,LTD.
T: + 86 755 2747 1900 F: + 86 755 2749 1460
A: 4-13/F,Building A,Sino-German(Europe)Industrial Park,Hangcheng Ave,Bao'an District,Shenzhen,China
E: info@growatt.com